

# SJRRP Flow Bench Evaluation

April 23, 2012

---

In the April 4, 2012 recommendation, the Restoration Administrator recommends increasing the combined Interim Flow and riparian release from Friant Dam to 700 cfs starting April 24, 2012. This document evaluates the recommended release. To date, groundwater levels in monitoring wells adjacent to the Eastside Bypass continue to restrict flows below Sack Dam to 0 cubic feet per second (cfs).

As of April 23, 2012:

1. Flow rates are below known conveyance thresholds.
2. Operations calls did not identify any concerns.
3. The seepage hotline received no calls to date in WY 2012.
4. Real-time groundwater monitoring identified two groundwater monitoring wells, MW-10-92 and MW-10-90, with levels above thresholds, Table 1. These wells do not restrict releases.
5. Priority well weekly groundwater measurements, Table 2, identified groundwater tables above thresholds in two additional wells, MW-10-94 and MW-10-95. While MW-10-94 does not restrict releases as groundwater levels there can drain, MW-10-95 restricts releases at this time.
6. Flow stability has been achieved.
7. Projected groundwater levels from the proposed increase in flow (Table 4) calculated based on groundwater levels measured the week ending April 14, show projected groundwater levels above thresholds in four wells.
8. The LSJLD has not identified any concerns.
9. The SJRECWA has not identified any concerns.

## Analysis

Priority well MW-10-95 (Reach 4B1 Eastside Bypass) measurements show depths to groundwater at 2.3 feet above the threshold. No water from the San Joaquin River currently reaches the Eastside Bypass. The projected water surface elevation in the Eastside Bypass adjacent to this well with 10 cfs in the channel is 92.7 feet above sea level. The threshold elevation in MW-10-95 is 92.8 feet above sea level. This does not provide enough of a gradient (0.1 feet) to allow groundwater levels to drain below the threshold. This well restricts releases past Sack Dam to 0 cfs at this time.

Priority well MW-10-94 (Reach 4B1 Eastside Bypass) measurements show depths to groundwater at 1.1 feet above the threshold. No water from the San Joaquin River currently reaches the Eastside Bypass. The projected water surface elevation in the Eastside Bypass

adjacent to this well with 10 cfs in the channel is 92.7 feet above sea level. The threshold elevation in MW-10-94 is 95.6 feet above sea level. This provides a gradient to allow groundwater levels to drain to below the threshold. This location does not provide a gradient to allow for drainage at flows of 100 cfs or above, and thus restricts flows below Sack Dam to less than 100 cfs at this time.

Priority well MW-10-90 (Reach 4B1 Eastside Bypass) measurements show depths to groundwater at 1.5 feet above the threshold. No water from the San Joaquin River currently reaches the Eastside Bypass. The projected water surface elevation in the Eastside Bypass adjacent to this well with 10 cfs in the channel is 94.2 feet above sea level. The threshold elevation in MW-10-90 is 95.1 feet above sea level. This provides a gradient to allow groundwater levels to drain to below the threshold. This location does not provide a gradient to allow for drainage at flows of 50 cfs or above, and thus restricts flows below Sack Dam to less than 50 cfs at this time.

## Data

Table 1 shows the groundwater depth in 7 realtime wells as of April 23, 2012. The data shows groundwater depths in two realtime groundwater wells above thresholds. The property underlying one of these realtime wells, MW-10-92, contains an existing tile drain.

**Table 1 – Realtime Well Data as of 4/23/2012**

Well	Reach	Measured Groundwater Depth in Well (feet bgs)	Ground Surface Buffer (feet)	Lateral Gradient Buffer (feet)	Field Depth (feet bgs)	Field Threshold (feet bgs)	Comment
MW-09-54B	2B	15.4	-7.9	5.5	12.9	10.0	Acceptable
PZ-09-R3-7	3	8.8	-0.7	0.0	8.0	3.5	Acceptable
MW-10-75	3	10.1	-0.5	0.2	9.8	6.3	Acceptable
MW-11-130	4A	6.7	0.0	0.0	6.7	5.0	Acceptable
MW-10-89	4A	12.4	-3.4	0.0	8.9	7.6	Acceptable
MW-10-92	4A	6.1	-2.6	0.0	3.5	5.0	Above Threshold
MW-10-90	4B1	4.8	0.8	0.0	5.5	7.0	Above Threshold
MW-11-142	4B1	5.4	0.0	0.0	5.4	4.0	Acceptable

bgs = below ground surface

Reclamation publishes the weekly groundwater report with manual measurements via electronic well sounder and recent flow data on the SJRRP website at:  
<http://www.restoresjr.net/flows/Groundwater/Groundwater.html>.

Table 2 shows the manual measurements from field staff as reported in the weekly groundwater report with a publish date of April 21, 2012. To calculate field depths, Reclamation adds ground

surface buffers and lateral gradient buffers to measured groundwater depths in the well. A negative ground surface buffer indicates the well is above the field.

**Table 2 – Priority Well Weekly Groundwater Measurements**

Well	Reach	Measured Groundwater Depth in Well (feet bgs)	Ground Surface Buffer (feet)	Lateral Gradient Buffer (feet)	Field Depth (feet bgs)	Field Threshold (feet bgs)	Comment
FA-9	2A	8.1	-3.7	2.5	6.9	5.0	Acceptable
MW-09-47	2A	8.4	-3.5	3.3	8.2	7.0	Acceptable
MA-4	2A	10.5	-6.1	4.6	9.0	7.0	Acceptable
MW-09-49B	2A	5.8	-1.7	2.4	6.5	4.5	Acceptable
MW-09-55B	2B	9.3	-3.7	3.0	8.6	7.0	Acceptable
PZ-09-R2B-1	2B	NR	-1.3	0.0	-	5.0	Acceptable
PZ-09-R2B-2	2B	NR	-3.9	0.0	-	4.5	Acceptable
PZ-09-R3-5	3	11.7	-1.2	0.0	10.5	5.0	Acceptable
PZ-09-R3-6	3	10.7	-1.5	0.0	9.2	4.0	Acceptable
MW-09-87B	4A	13.3	-1.9	1.0	12.4	4.2	Acceptable
MW-10-94	4B1	4.9	0.0	1.0	5.9	7.0	Above Threshold
MW-10-95	4B1	4.0	-2.2	1.0	2.7	5.0	Above Threshold

Note: bgs = below ground surface

Table 3 shows the anticipated flow rates used to evaluate future groundwater depths. Reclamation calculated losses from Friant Dam to the Mendota Pool based on the long-term pattern established by Exhibit B.

**Table 3 Anticipated Change in Flows**

	Recent Flows (cfs)	Projected Flows for Evaluation (cfs)
Reach 1	500	700
Reach 2A	355	555
Reach 2B	265	465
Reach 3	300	300
Reach 4A	0	0
Reach 4B1 (ESB)	0	0

Table 4 shows the current and maximum rise in groundwater based on estimated changes in river stage and the conceptual model shown in Figure 2. Field depths are calculated by taking the most recent measurements from Table 2, adding the ground surface and the lateral gradient buffer, and subtracting the maximum predicted stage increase. Subsequent pages show the rating curves for each of the key wells from the Mussetter Engineering, Inc., 2008 San Joaquin HEC-RAS Model

Documentation Technical Memorandum prepared for California Dept. of Water Resources,  
Fresno, California, June 2.

**Table 4 Predicted Groundwater Levels for Key Wells**

Well	Reach	Measured Groundwater Depth in Well (feet bgs)	Maximum Predicted Stage Increase (feet)	Ground Surface Buffer (feet)	Lateral Gradient Buffer (feet)	Predicted Shallowest Depth (feet bgs)	Field Threshold (feet bgs)	Comment
FA-9	2A	8.1	0.5	-3.7	2.5	6.4	5.0	Acceptable
MW-09-47	2A	8.4	0.5	-3.5	3.3	7.8	7.0	Acceptable
MA-4	2A	10.5	0.7	-6.1	4.6	8.3	7.0	Acceptable
MW-09-49B	2A	5.8	0.8	-1.7	2.4	5.8	4.5	Acceptable
MW-09-54B	2B	15.4	0.8	-7.9	5.5	12.1	10.0	Acceptable
MW-09-55B	2B	9.3	0.8	-3.7	3.0	7.8	7.0	Acceptable
PZ-09-R2B-1	2B	NR	0.1	-1.3	0.0	-	5.0	Acceptable
PZ-09-R2B-2	2B	NR	0.0	-3.9	0.0	-	4.5	Acceptable
PZ-09-R3-5	3	11.7	0.0	-1.2	0.0	10.5	5.0	Acceptable
PZ-09-R3-6	3	10.7	0.0	-1.5	0.0	9.2	4.0	Acceptable
PZ-09-R3-7	3	8.8	0.0	-0.7	0.0	8.0	3.5	Acceptable
MW-10-75	3	10.1	0.0	-0.5	0.2	9.8	6.3	Acceptable
MW-11-130	4A	6.7	1.2	0.0	0.0	5.5	5.0	Acceptable
MW-09-87B	4A	13.3	0.0	-1.9	1.0	12.4	4.2	Acceptable
MW-10-89	4A	12.4	0.0	-3.4	0.0	8.9	7.6	Acceptable
MW-10-92	4A	6.1	0.0	-2.6	0.0	3.5	5.0	Interceptor Line In Use

Table 5 shows the predicted maximum rise in groundwater based the elevation of the water surface in the river and the conceptual model shown in Figure 2. Reclamation uses this drainage method where current groundwater levels are higher than thresholds without flows in the San Joaquin River.

**Table 5: Predicted Groundwater Elevation for Key Wells**

Well	Reach	Predicted Elevation in Model (feet)	Threshold Elevation (feet)	Drainage Method Comment
MW-10-90	4B1	94.0	95.1	Acceptable
MW-10-94	4B1	92.4	95.6	Acceptable
MW-10-95	4B1	92.4	92.8	Approximately at threshold
MW-11-142	4B1	0.0	92.0	Acceptable







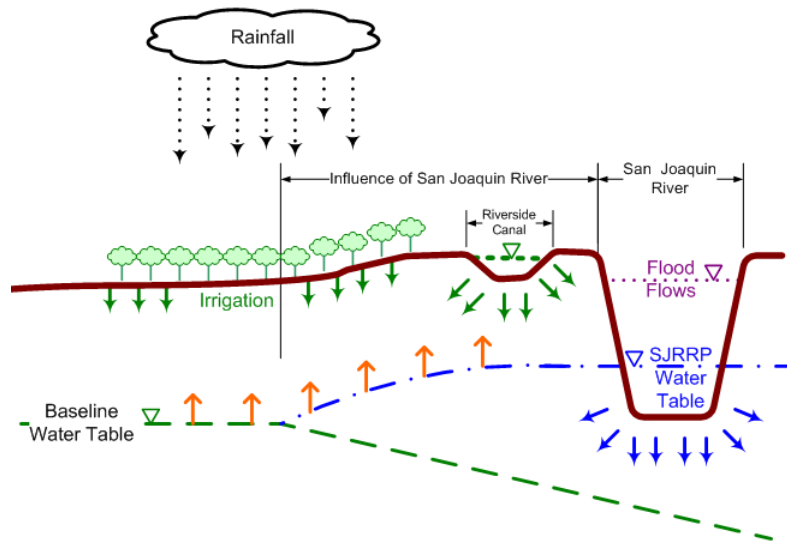


Figure 1 Conceptual Model for Flow Bench Evaluations Estimated Groundwater Depths



DRAFT

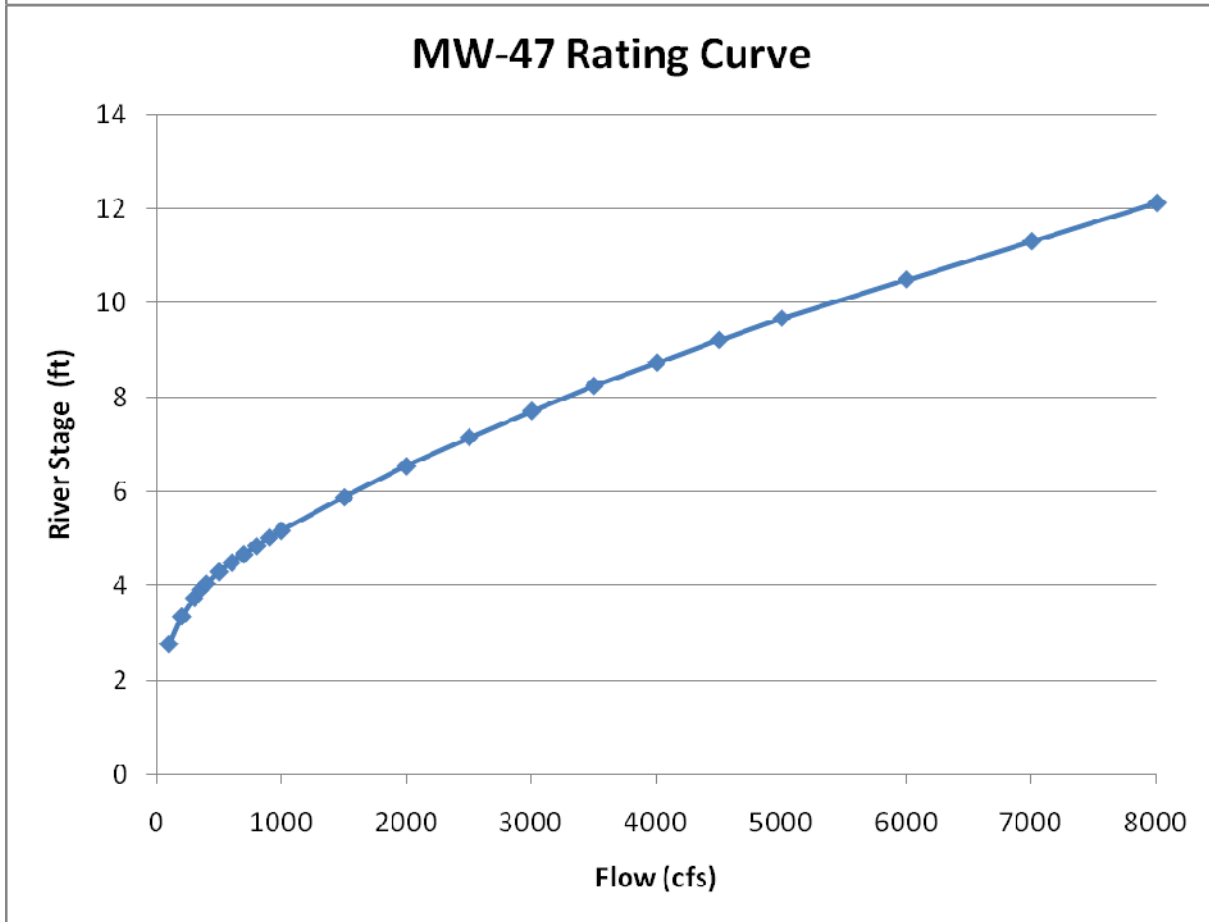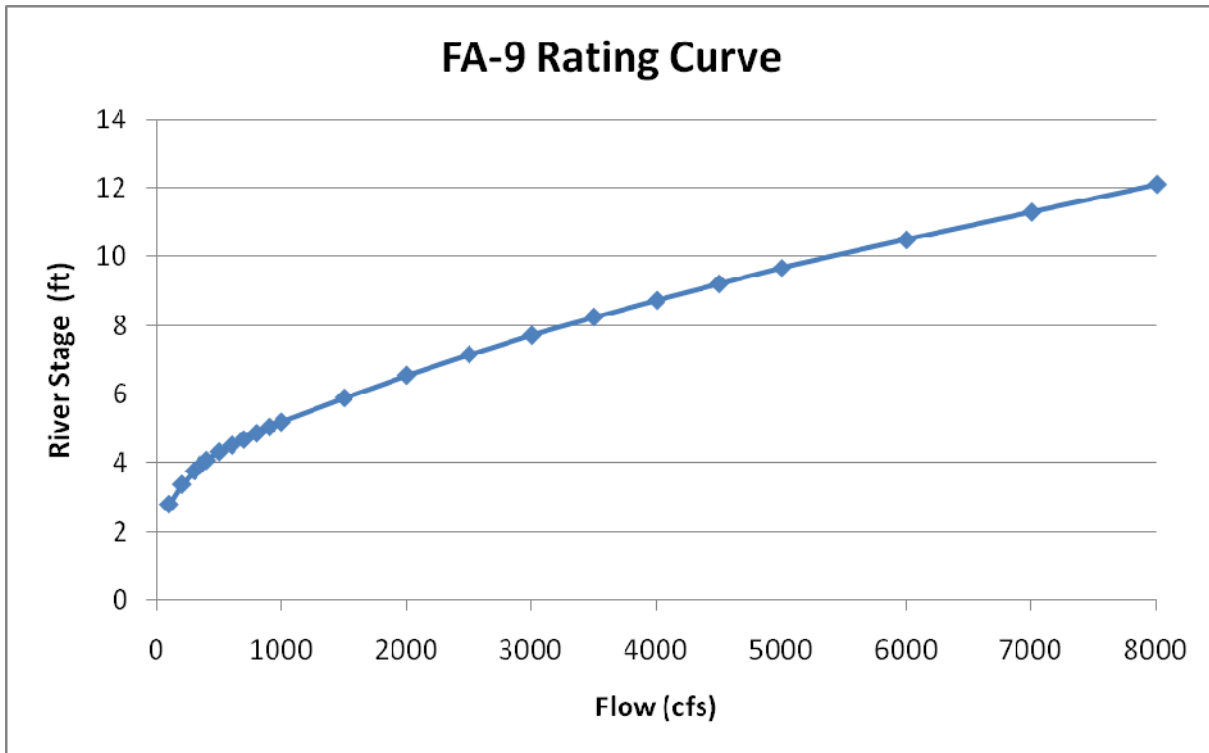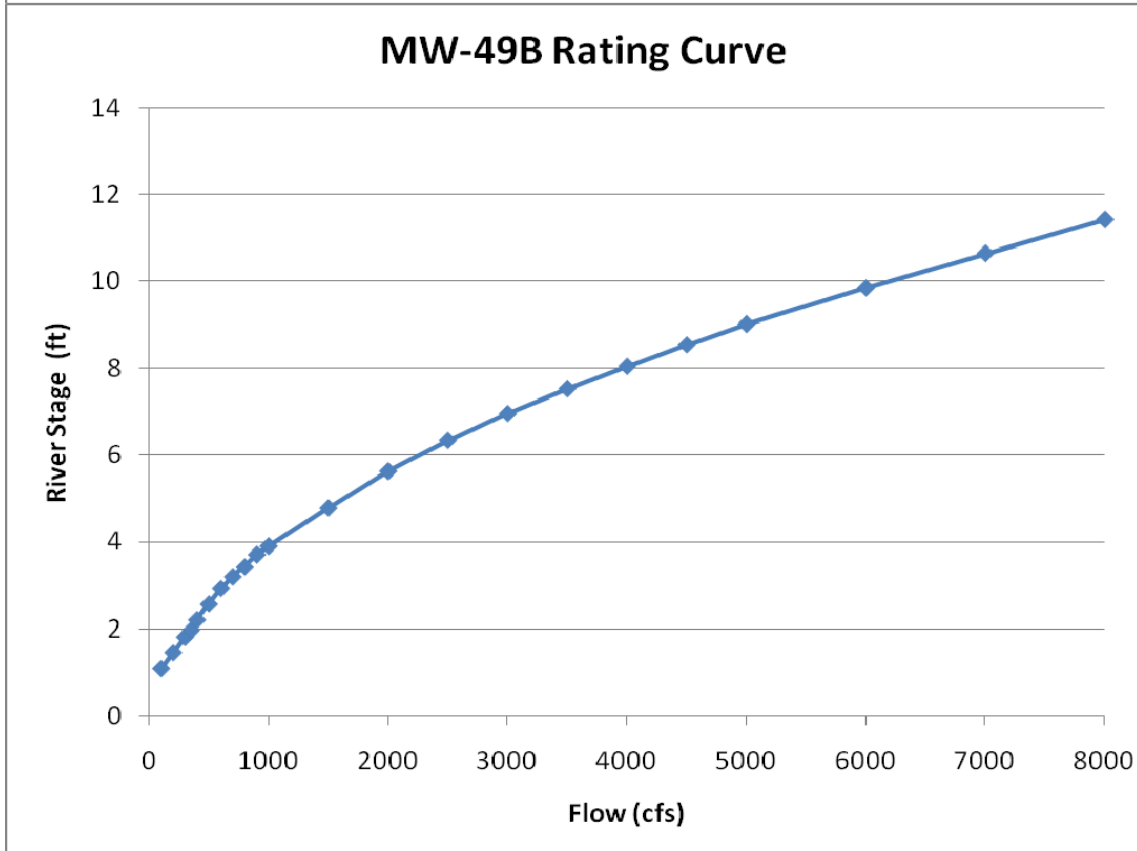
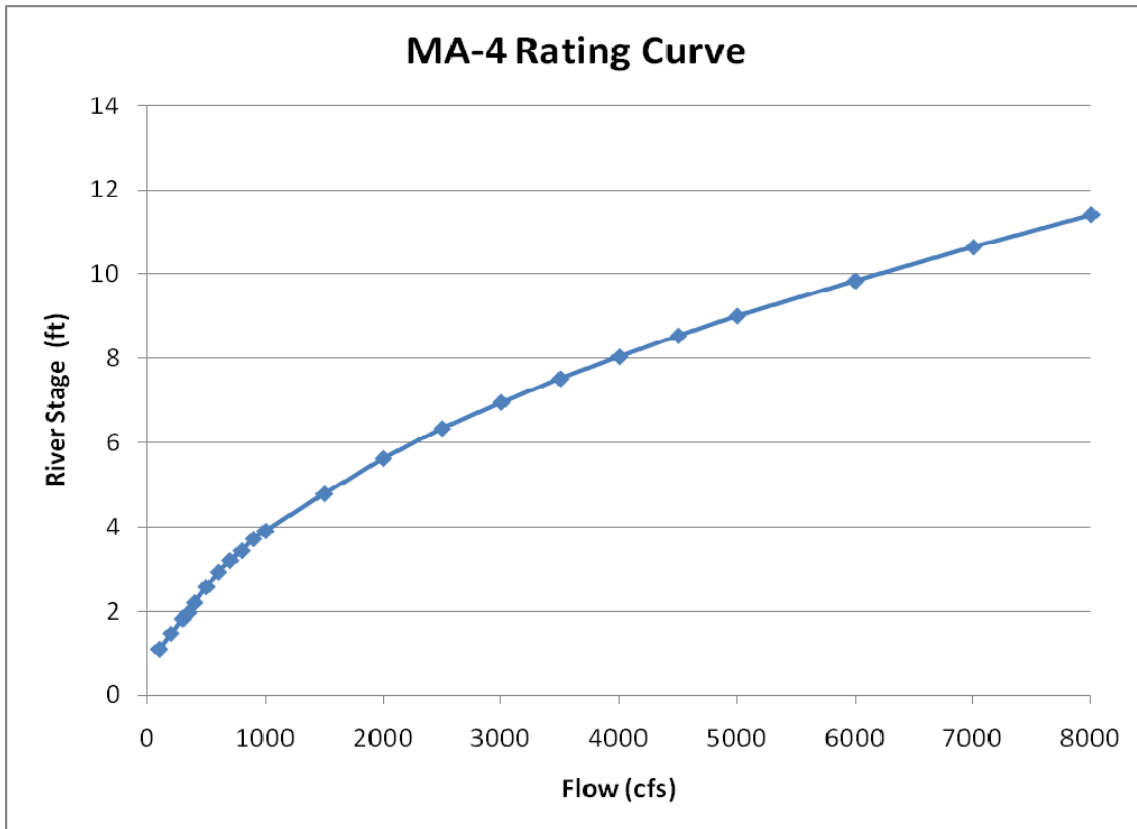



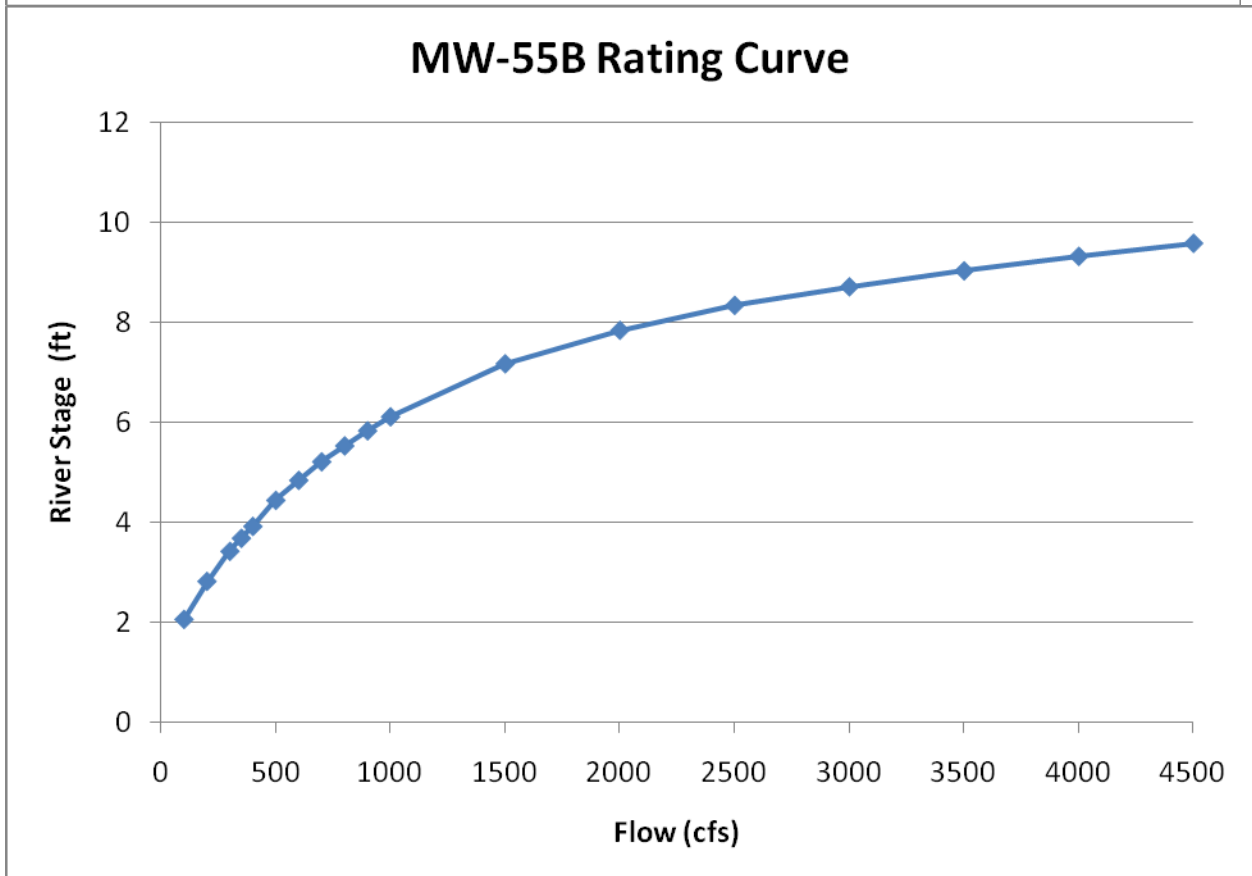


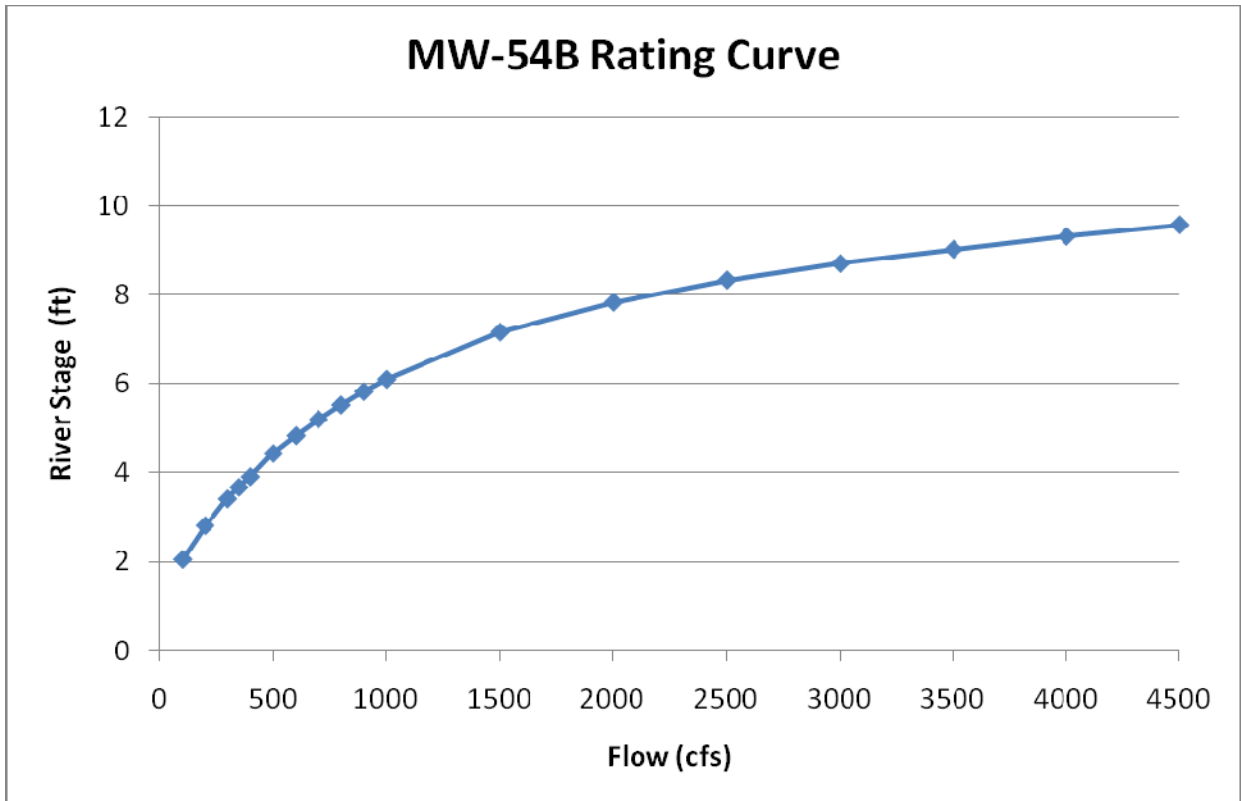




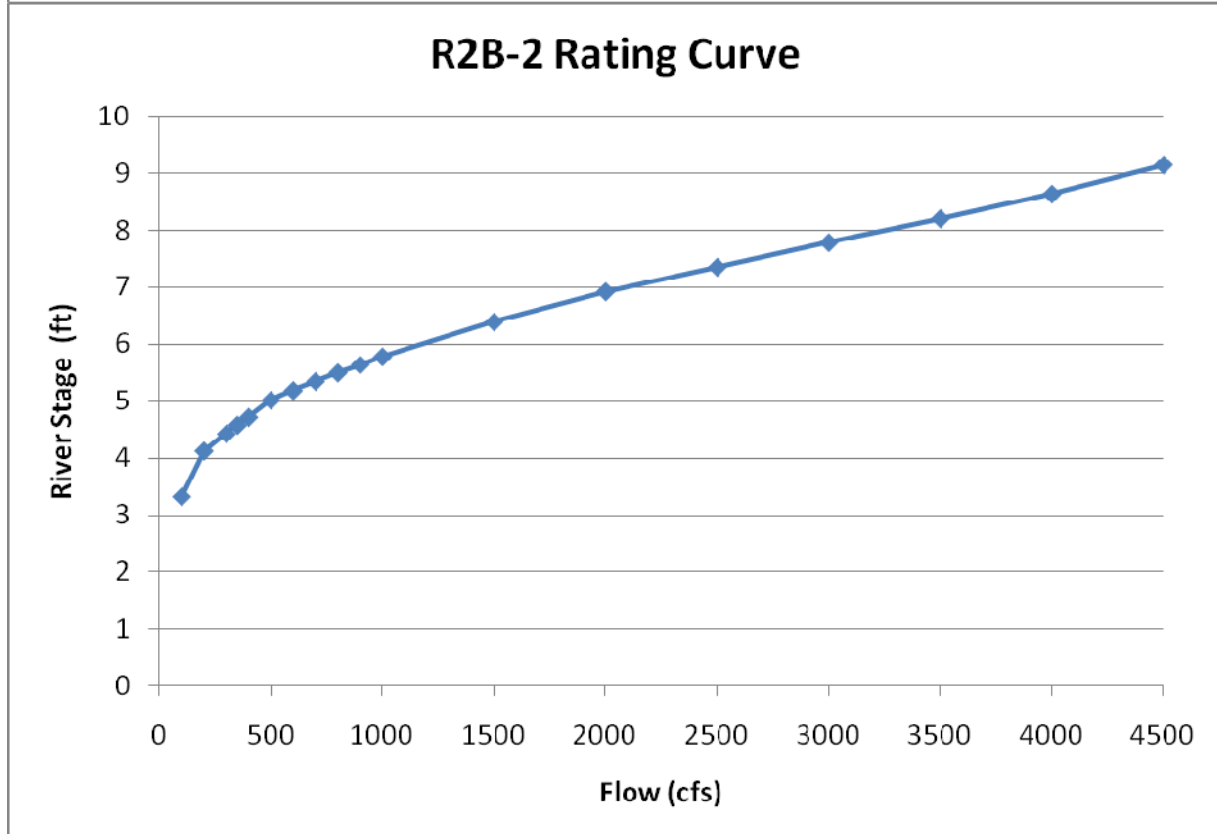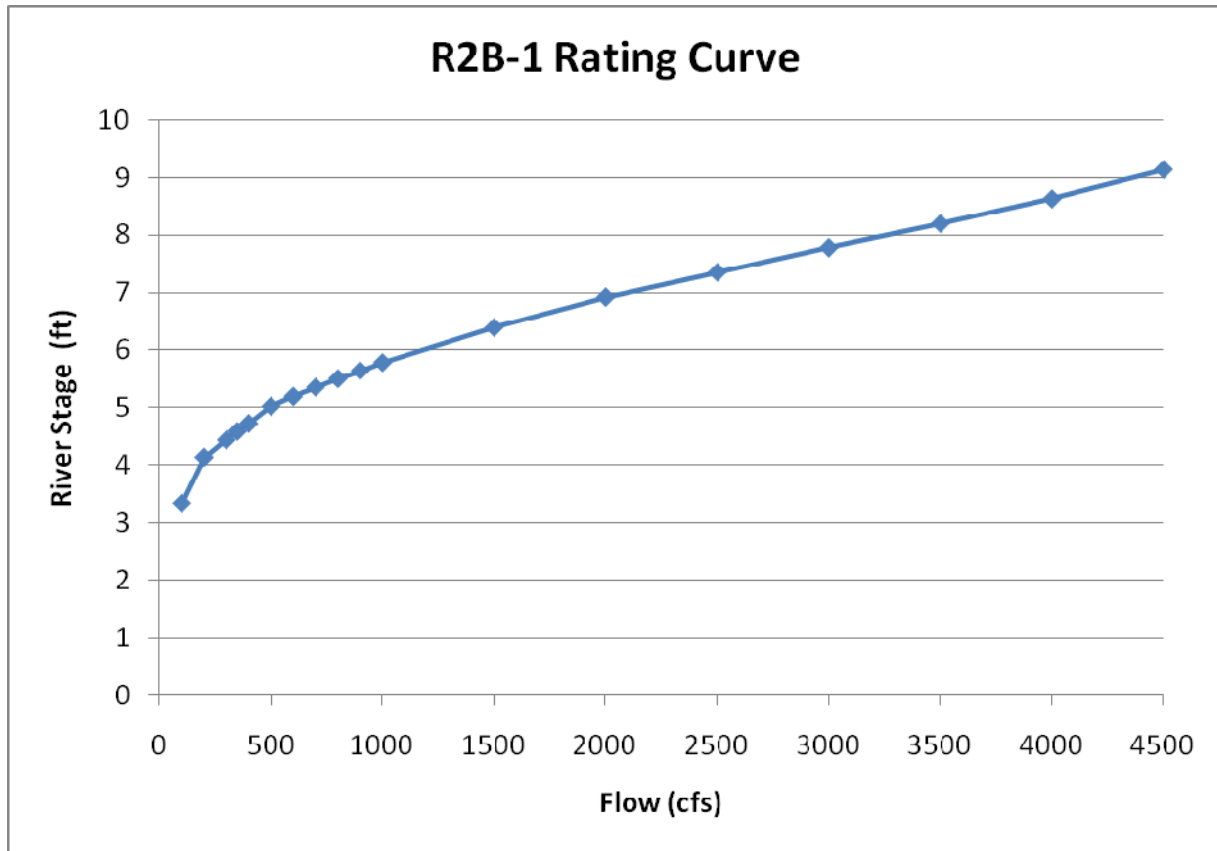

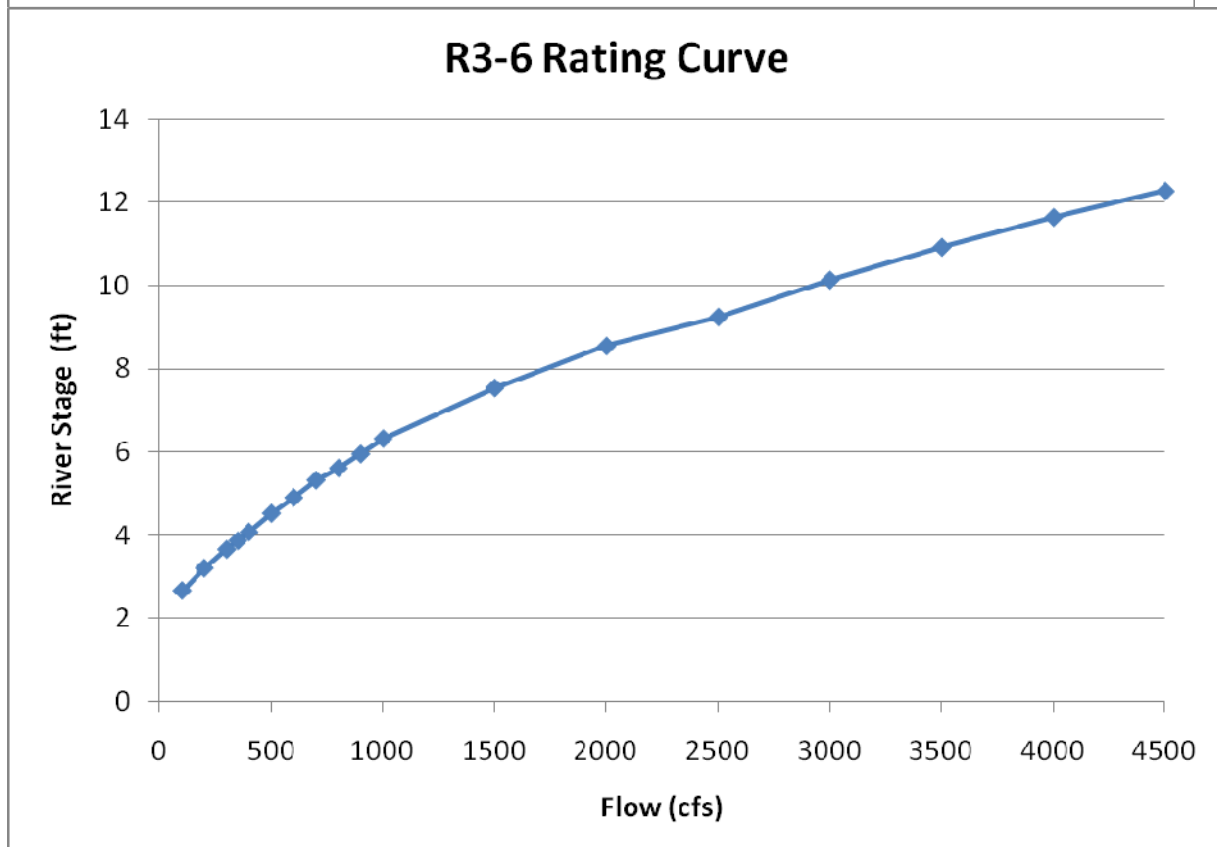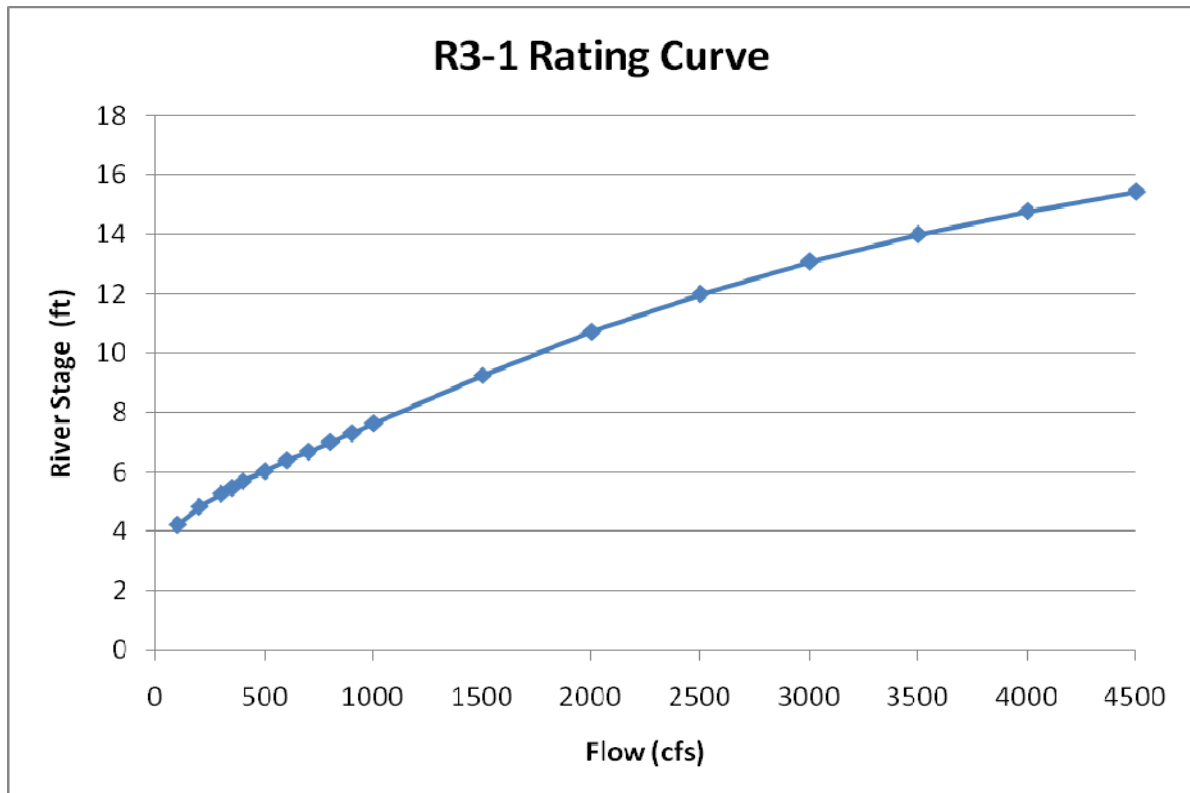

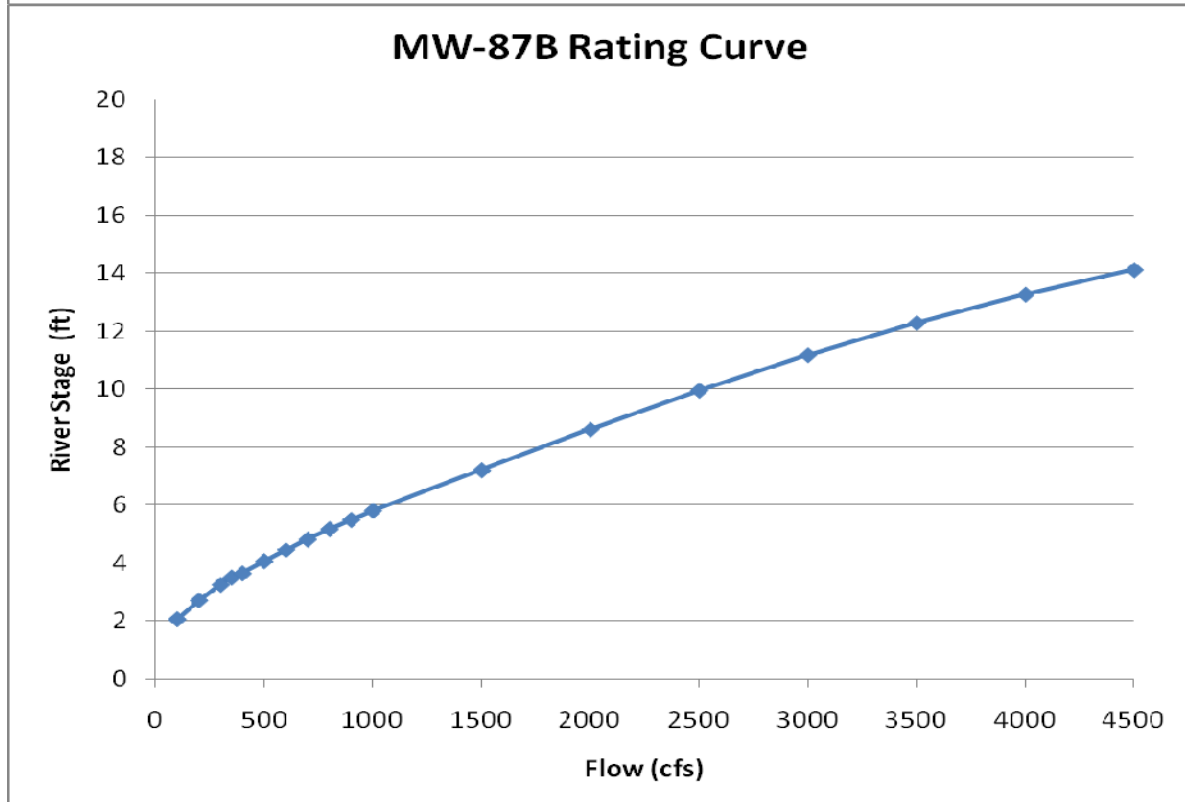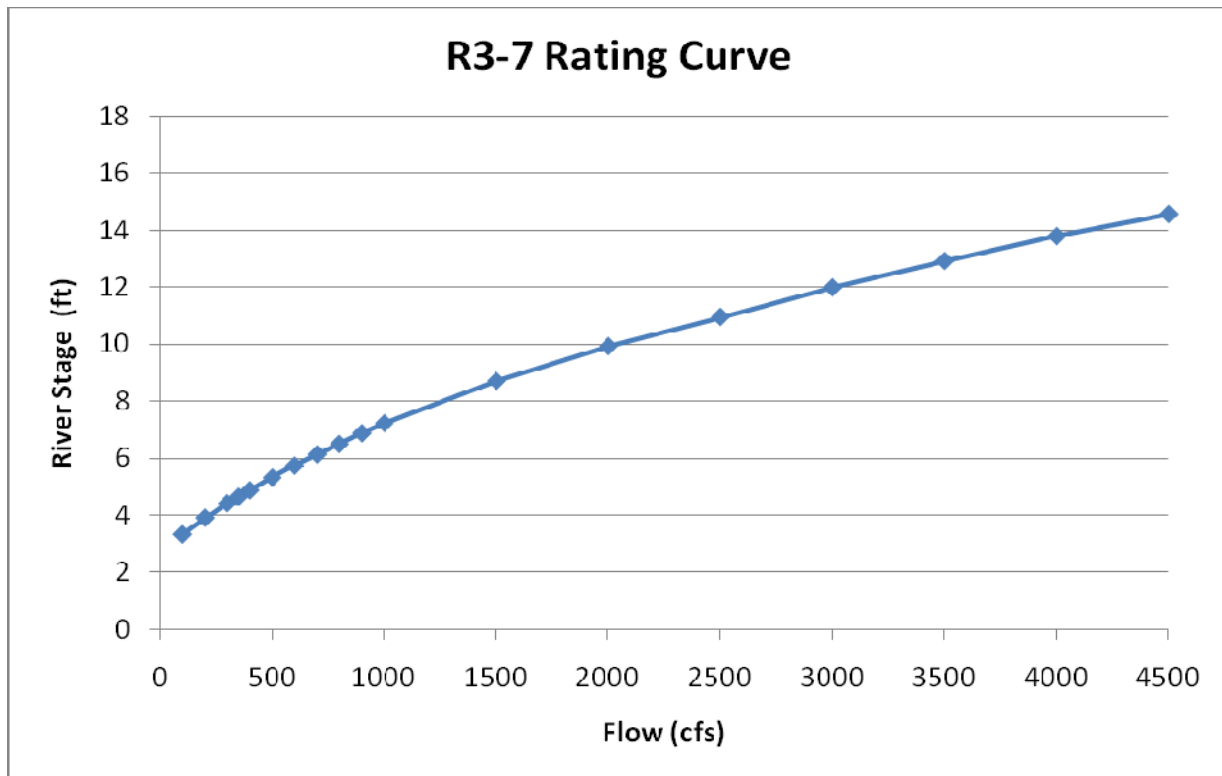

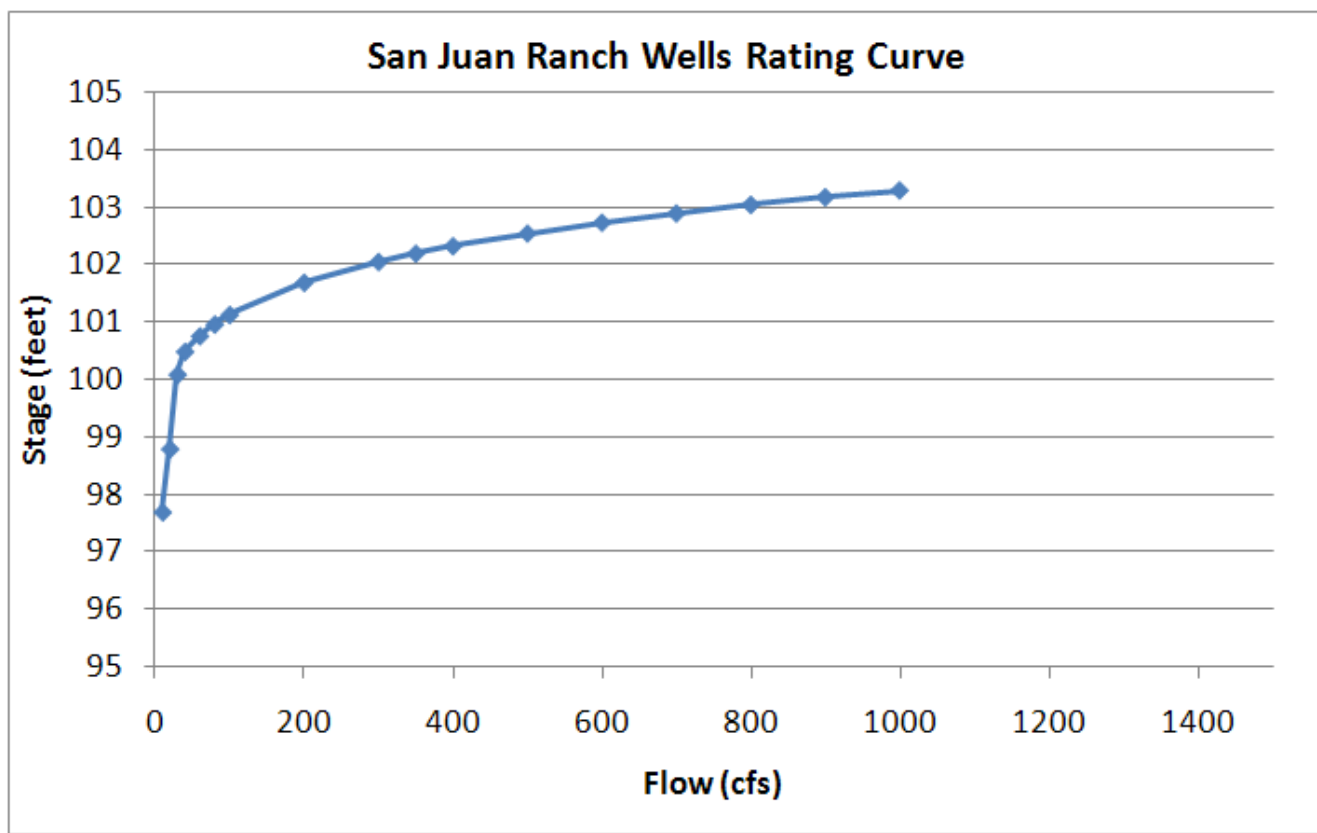

DRAFT